


> HIGH EFFICIENCY without compromise

True, on-line, double conversion UPS systems have always been the preferred topology for mission critical applications because they offer lower risk of load loss. In the past, however, these systems offered lower efficiency when compared to off-line, delta conversion, economy mode and other standby type UPS systems. That was until now!

Mitsubishi's patented technology provides for a true on-line UPS system that offers high efficiencies no matter what the load. There is no longer a need to compromise system availability by using risky topologies to achieve high efficiency.

The Power of Green

The vision of Mitsubishi is to continuously produce value add products instilled with ingenuity and breakthrough technologies. This vision brings you the 9900A Series, our most efficient, smallest footprint and lightweight UPS product series.

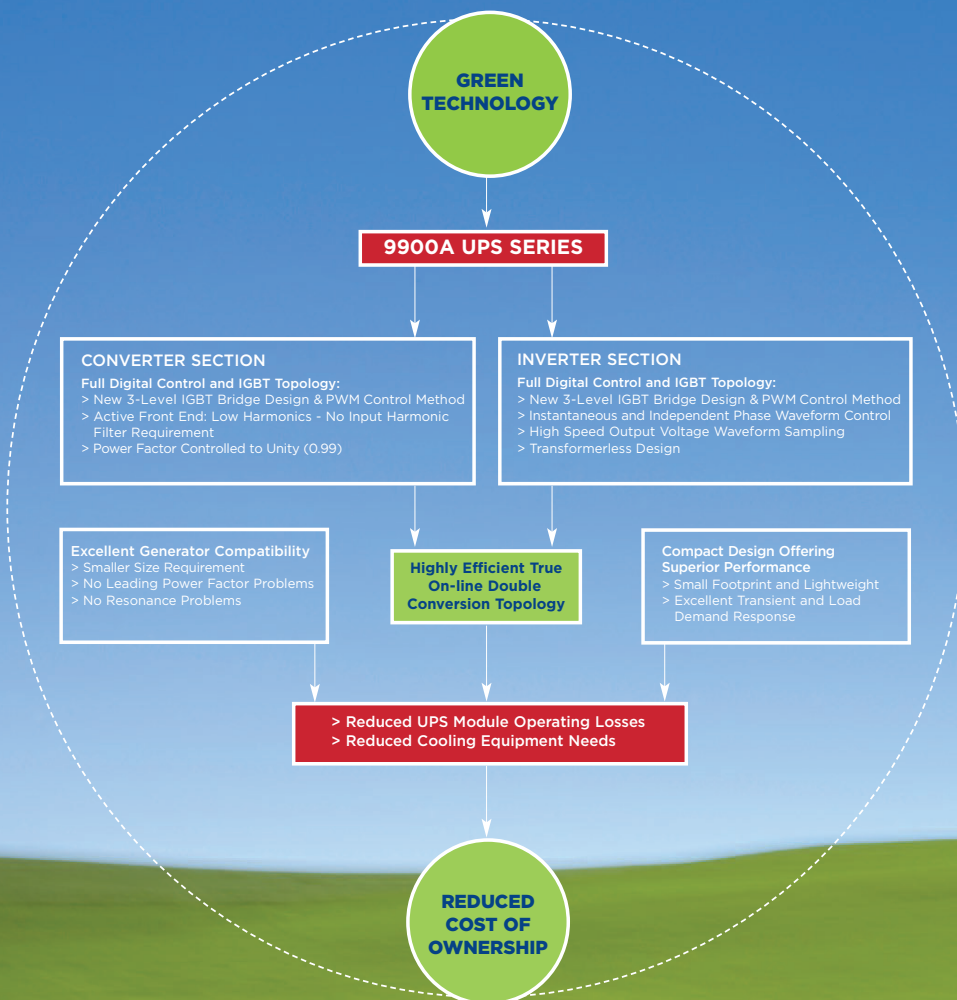

Official Sponsor

Mitsubishi Electric Power Products, Inc. (MEPPI)
Uninterruptible Power Supplies (UPS) Division
547 Keystone Drive • Warrendale, PA 15086
Phone: 724-772-2555 • Fax: 724-778-3146

An ISO 9001 and 14001 Certified Company

www.meppi.com



SA-ENL0008 • (09/13)



9900A UPS

UNINTERRUPTIBLE POWER SUPPLIES

80KVA - 225KVA

Efficiency & FLEXIBILITY

EXCEPTIONAL EFFICIENCY

The 9900A Series UPS delivers as much as 97% system efficiency, which reduces operating and cooling costs significantly, when compared to its competitors. The 9900A Series UPS has efficiency ratings as high as 94% with loads as low as 20%. The result: reduced cost of ownership and improved power usage effectiveness (PUE) compared to conventional UPS.

COMPACT LIGHTWEIGHT DESIGN

The small footprint and lightweight design of the 9900A Series saves on precious data center floor space. This system not only saves on floor space, it offers the flexibility of adding or removing modules with minimal cost. As a result, system options are enhanced.

The 9900A UPS system uses the most advanced Insulated Gate Bipolar Transistors (IGBT) in both the converter and Inverter. This unique combination simply means our 9900A UPS offers superior reliability, performance, and is the most efficient true on-line double conversion UPS in the industry at all load levels.

100kVA
Model



9900 UPS Series

9900A

The 9900A UPS system uses the most advanced Insulated Gate Bipolar Transistors (IGBT) in both the converter and inverter. This unique combination simply means our **9900A UPS** offers superior reliability and the most efficient system in the industry.



SERIES
>9900AUPS

Mitsubishi Electric raises the bar with the introduction of the 9900A Series Uninterruptible Power Supply (UPS). Its patented inverter design produces the highest efficiency in the industry to go along with the quality and reliability that users are accustomed to when specifying Mitsubishi. Let's explore the benefits that you can expect.

EXCEPTIONAL EFFICIENCY

The 9900A Series UPS, with a very flat efficiency curve, delivers efficiency rates up to 97% above 50% loads and 95.6% at 25% load. Even at 10%, load efficiency ratings greater than 90% are seen. This system efficiency substantially reduces operating and cooling costs. The result, reduced cost of ownership and improved power usage effectiveness (PUE) compared to conventional UPS.

RELIABILITY AND ADAPTABILITY


No organization in the UPS industry offers the in-depth experience and unparalleled quality as Mitsubishi Electric. Precision engineering and years of experience pioneering cutting edge inverter and converter design gives the users the best performing, most reliable UPS in market.

Because each module features its own static bypass and control circuitry, the 9900A UPS can be utilized in single module (SMS) or multi-module (MMS) configurations. This allows for a highly reliable and flexible system approach. If loads on a MMS decrease, a module or modules can be removed and used elsewhere in a single module application. Likewise, an existing SMS can be paralleled for capacity or redundancy at a later date.

KVA	INPUT	OUTPUT	OUTPUT PF	DIMENSIONS (WXDXH)	LBS	PARALLEL CAPABILITIES	DC
80	480 VAC	480 VAC	0.9	27.6" X 32.8" X 80.6"	855	UP TO 4 MODULES	480 VDC
100	480 VAC	480 VAC	0.9	27.6" X 32.8" X 80.6"	855	UP TO 4 MODULES	480 VDC
150	480 VAC	480 VAC	0.9	35.4" X 32.8" X 80.6"	1,160	UP TO 4 MODULES	480 VDC
225	480 VAC	480 VAC	0.9	35.4" X 32.8" X 80.6"	1,230	UP TO 4 MODULES	480 VDC

RELIABILITY
3-year-warranty*

*3-year warranty standard. New low cost no worry 5-year warranty available. Please contact MEPPI at 724-778-3134 for details.

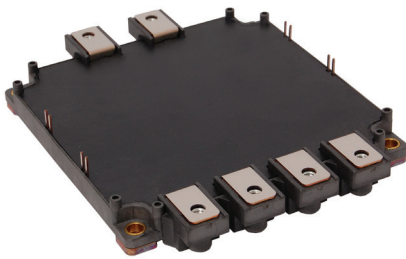

Mitsubishi Electric

Customized IGBT Module

Mitsubishi Electric is the leading manufacturer of Insulated Gate Bipolar Transistors (IGBT). Customized IGBT modules are utilized in the 9900A Series UPS Systems. These advanced, high-performance transistors provide a variety of intelligent features:


- > Large Power Capabilities
- > High Speed Switching
- > Low Control Power Consumption
- > Low Switching Loss

IGBT has become the preferred power device for UPS systems, but it is how the IGBT power device is controlled that is key to achieving optimum UPS performance.

IGBT

EFFICIENT
up to 97% system efficiency

At Mitsubishi Electric Power Products, Inc., we understand that in today's high-speed, digital world, critical load downtime can cost your company millions of dollars. That is why we have developed the 9900 series UPS – our most innovative and efficient UPSs.

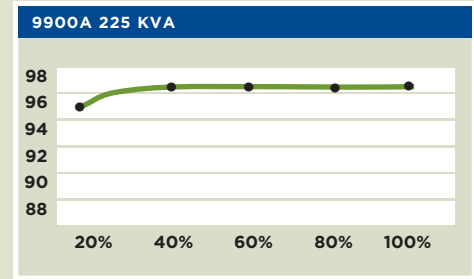

TYPICAL TEST RESULTS

STANDARD FEATURES

- > Fully Digital, IGBT Converter and Inverter
- > Advanced 3-Level Circuit Topology and Pulse Width Modulation (PWM)
- > Parallel up to Four (4) Modules
- > Front Access UPS
- > Small Footprint and Weight
- > UL 1778 Listed
- > ENERGY STAR certified

AC INPUT

- > 480VAC 3P, 3W, 60 Hz
- > +15%, -20% Voltage Range
- > <3% THD @ 100% Load
- > Power Factor: .99
- > Surge Withstand: meets IEEE, 587. ANSI C62.41-1991

DC LINK VOLTAGE


- > 480VAC

AC OUTPUT

- > 480 VAC 3P, 3W, 60 Hz
- > Power Factor: 0.9
- > Voltage Accuracy: ± 1%
- > Transient Recovery Time: 20 Milliseconds
- > Step Load (100%): ± 2%
- > Voltage THD: 2% Maximum @ 100% Linear Load
- > Overload: 125% for 2 Minutes, 150% for 1 Minute
- > FCC Compatibility: CFR 47, Part 15 Subpart B, Class A

OPERATING ENVIRONMENT

- > Audible Noise: 70dB @ 1 Meter
- > Temperature: 0–40°C
- > Relative Humidity: 5–95% (Non-condensing)
- > Altitude: 0–7,400 ft.

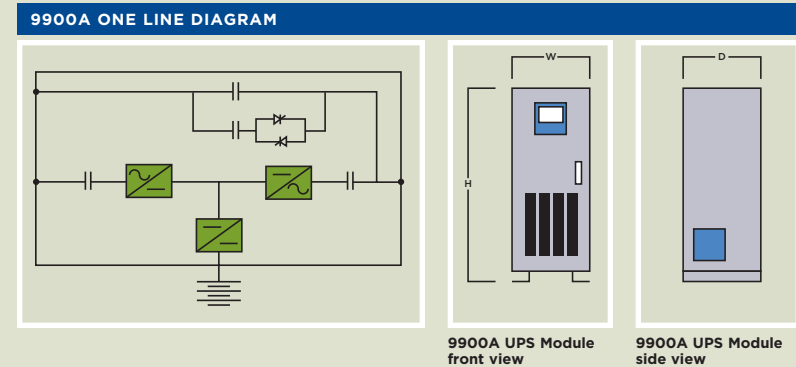

9900A UPS Module front view

9900A UPS Module side view




FLEXIBLE
system flexibility

9900A UPS MULTI-MODULE SYSTEM (MMS) LINE UP

The Mitsubishi 9900A Multi-Module System (MMS) incorporates individual parallel control and static bypass circuitry in each independent UPS Module. Our 9900A MMS therefore offers complete system redundancy, reliability and flexibility with cost saving scalability and a reduced footprint.

MITSUBISHI 9900A MMS FEATURES INCLUDE:

- > Up to 4 UPS Modules in Parallel
- > Cross Current Sensorless Control
- > System Operation and Monitoring from any UPS Module
- > UPS Module Adaptable for MMS or SMS Operation
- > Customizable Input and Output Distribution
- > System Load Bank Test Circuit (Optional)
- > Parallel for Redundant or Capacity System Configuration

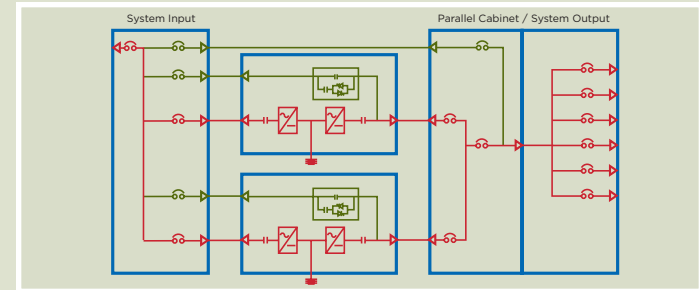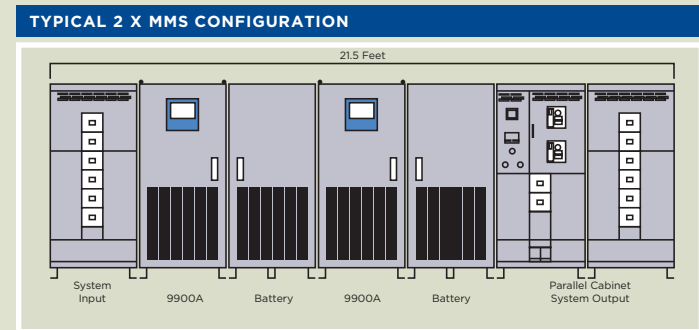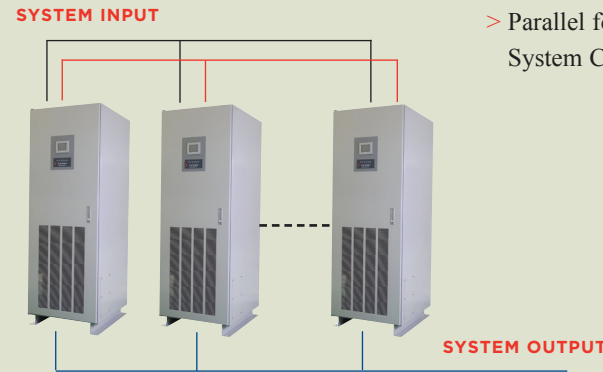

Note: Dimensions dependent on system design and configuration.