


HR1221W-FR (12V21 Watts/cell)

Specifications


Nominal Voltage		12V
Number of cell		6 cells
Rated capacity(15min.rat)		21 Watts/cell
Dimensions	Length	90±1mm(3.54inch)
	Width	70±1mm(2.76inch)
	Height	101±1mm(3.98inch)
	Total Height	107±1mm(4.21inch)
Approx. Weight		1.62kg(3.57lbs)±4%



Outer dimensions (mm)

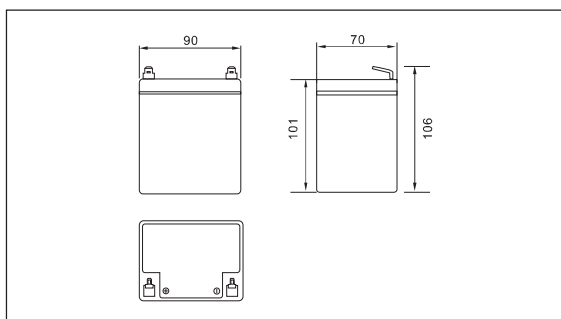

Terminal Type (mm)

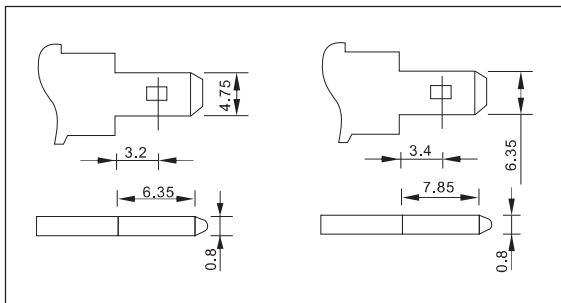

Characteristics

Capacity(20HR,25℃)		5Ah
Capacity(15min.rate,25℃)		21 Watts/cell
Terminal type		T2/T1
Internal resistance (Fully charged,25℃)		Approx.23m Ω
Capacity affected by temperature (10HR)	40℃	102%
	25℃	100%
	0℃	85%
	-15℃	65%
Self-discharge (25℃)	3month	Remaining Capacity:91%
	6month	Remaining Capacity:82%
	12month	Remaining Capacity:65%
Nominal operating temperature		25℃ ±3℃(77°F ±5°F)
Operating temperature range	Discharge	-15℃~50℃(5°F~122°F)
	Charge	-10℃~50℃(14°F~122°F)
	Storage	-20℃~50℃(-4°F~122°F)
Float charging voltage(25℃)		13.50 to 13.80V Temperature compensation: -18mV/℃
Cyclic charging voltage(25℃)		14.50 to 15.00V Temperature compensation: -30mV/℃
Maximum charging current		1.5A
Terminal material		Copper
Maximum discharge current		75A(5 sec.)
Designed floating life(20℃)		5years

Construction

Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Leaddioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper

Constant Current Discharge Characteristics Unit:A(25℃,77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h
1.60V/cell	22.8	14.0	11.0	8.71	5.90	4.37	3.58	1.84	1.31	1.05	0.90
1.67V/cell	21.7	13.4	10.6	8.36	5.71	4.23	3.49	1.82	1.29	1.04	0.89
1.70V/cell	21.2	13.0	10.3	8.19	5.61	4.15	3.43	1.81	1.29	1.04	0.89
1.75V/cell	20.3	12.5	10.0	7.91	5.47	4.05	3.36	1.78	1.28	1.03	0.89
1.80V/cell	19.1	11.8	9.5	7.49	5.27	3.90	3.26	1.74	1.24	1.00	0.86


Constant Power Discharge Characteristics Unit:W(25℃,77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h
1.60V/cell	43.7	27.2	21.8	17.2	11.7	8.65	7.08	3.66	2.62	2.11	1.81
1.67V/cell	41.7	26.0	21.0	16.6	11.3	8.38	6.90	3.62	2.60	2.09	1.80
1.70V/cell	40.6	25.3	20.5	16.2	11.1	8.22	6.80	3.60	2.59	2.08	1.79
1.75V/cell	38.9	24.2	19.8	15.7	10.8	8.02	6.66	3.55	2.57	2.07	1.78
1.80V/cell	36.7	22.8	18.7	14.8	10.4	7.73	6.46	3.46	2.50	2.01	1.73


Note: The above characteristics data can be obtained within three charge or discharge cycles.

HR1221W-FR (12V21 Watts/cell)


● Discharge characteristics(25°C)

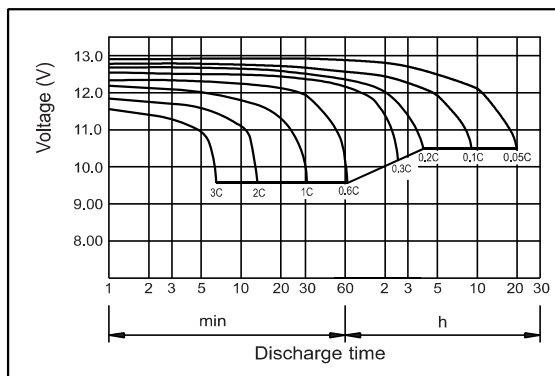


● Charging characteristics (25°C)

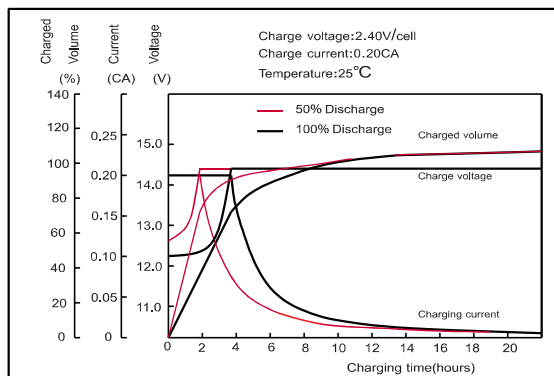


● Effect of Temperature on Capacity

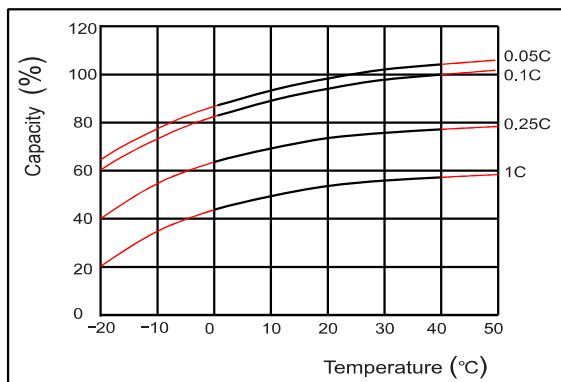


● Self-discharge characteristics

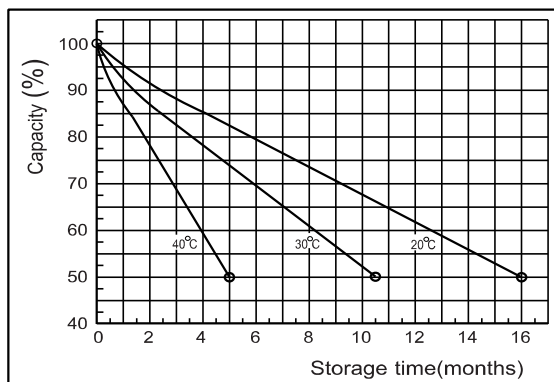


● Floating Life on Temperature

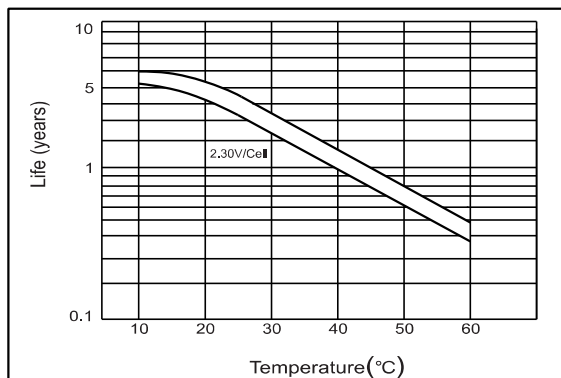

● Cycle service Life on D.O.D (25°C)

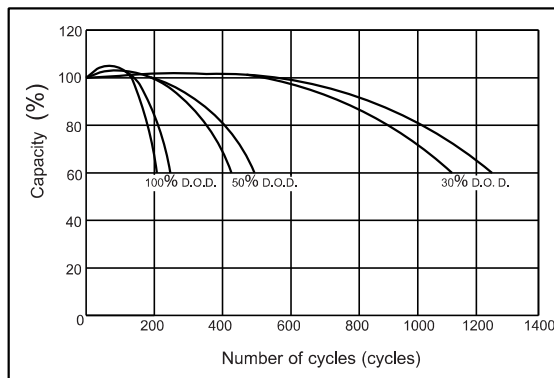

● The relationship for OCV and Capacity (25°C)

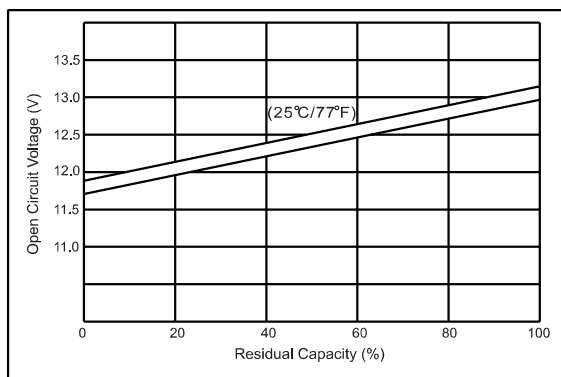

● The relationship for Charging voltage and Temperature

