


HR1280W-FR (12V80 Watts/cell)


Specifications

Nominal Voltage		12V
Number of cell		6 cells
Rated capacity(15min.rat)		80 Watts/cell
Dimensions	Length	181 ± 2mm(7.13inch)
	Width	77 ± 1mm(3.03inch)
	Height	167 ± 2mm(6.57inch)
	Total Height	167 ± 2mm(6.57inch)
Approx. Weight		5.9kg(12.98lbs) ± 3%

Outer dimensions (mm)

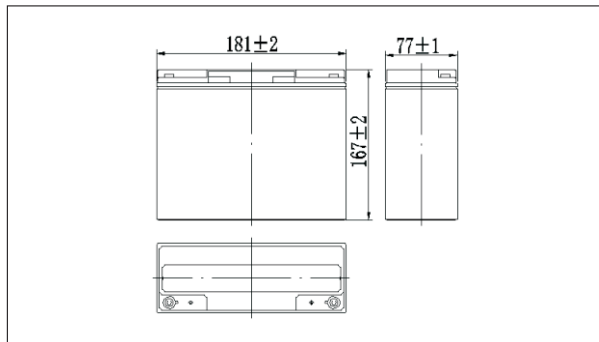

Terminal Type (mm)

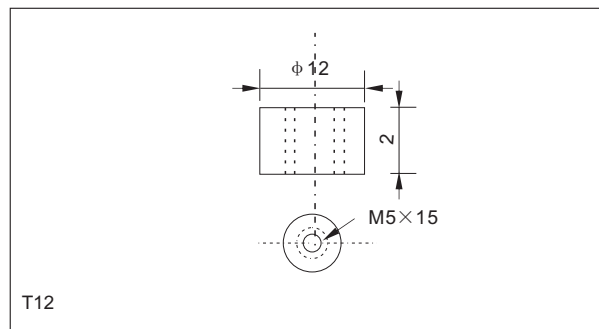

Characteristics

Capacity(20HR,25℃)		22Ah
Capacity(15min.rate,25℃)		80 Watts/cell
Terminal type		T12
Internal resistance (Fully charged,25℃)		Approx.12m Ω
Capacity affected by temperature (10HR)	40℃	102%
	25℃	100%
	0℃	85%
	-15℃	65%
Self-discharge (25℃)	3 months	Remaining Capacity:91%
	6 months	Remaining Capacity:82%
	12 months	Remaining Capacity:65%
Nominal operating temperature		25℃±3℃(77°F±5°F)
Operating temperature range	Discharge	-15℃~50℃(5°F~122°F)
	Charge	-10℃~50℃(14°F~122°F)
	Storage	-20℃~50℃(-4°F~122°F)
Float charging voltage(25℃)		13.50 to 13.80V Temperature compensation: -18mV/℃
Cyclic charging voltage(25℃)		14.50 to 15.00V Temperature compensation: -30mV/℃
Maximum charging current		5.4A
Maximum discharge current		270A(5 sec.)
Designed floating life(20℃)		5years

Construction

Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper

Constant Current Discharge Characteristics Unit:A(25℃,77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h
1.60V/cell	85.9	52.9	41.6	32.9	22.3	16.5	13.5	7.64	5.43	4.37	3.75
1.67V/cell	82.6	50.9	40.0	31.6	21.4	15.9	13.0	7.35	5.22	4.20	3.61
1.70V/cell	78.9	48.6	38.6	30.4	20.7	15.4	12.7	7.28	5.18	4.17	3.58
1.75V/cell	76.8	47.3	37.6	29.7	20.4	15.1	12.5	7.24	5.16	4.15	3.56
1.80V/cell	73.5	45.3	36.3	28.7	19.9	14.7	12.2	7.13	5.12	4.12	3.54


Constant Power Discharge Characteristics Unit:W(25℃,77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h
1.60V/cell	167	104	84.0	65.7	44.5	32.9	27.0	15.3	11.0	8.79	7.55
1.67V/cell	159	98.7	80.1	62.6	42.4	31.4	25.7	14.6	10.5	8.37	7.19
1.70V/cell	151	94.3	76.4	60.1	41.1	30.4	25.1	14.5	10.4	8.34	7.17
1.75V/cell	148	91.8	74.4	58.9	40.3	29.8	24.7	14.4	10.4	8.28	7.12
1.80V/cell	141	87.9	71.8	56.8	39.3	29.1	24.2	14.2	10.3	8.03	6.90


Note: The above characteristics data can be obtained within three charge or discharge cycles.

HR1280W-FR (12V80 Watts/cell)


● Discharge characteristics(25°C)

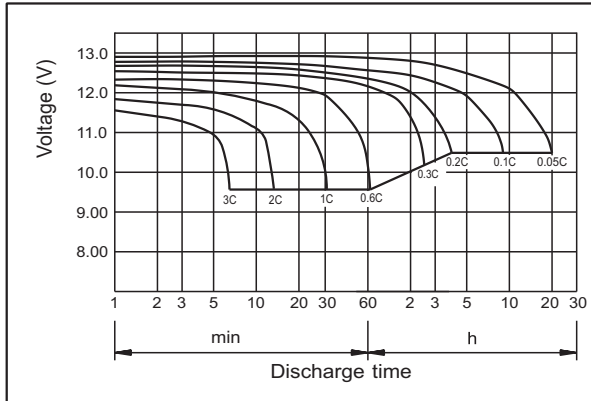


● Charging characteristics (25°C)

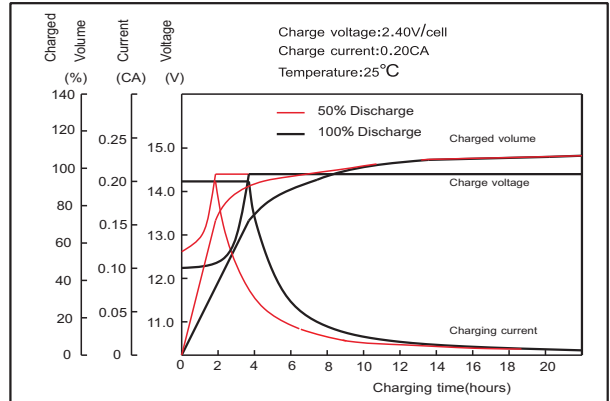


● Effect of Temperature on Capacity

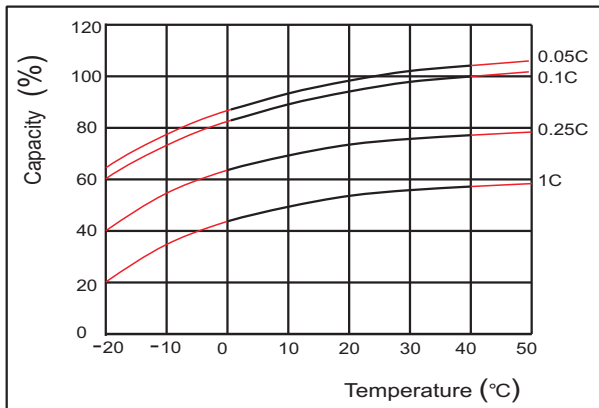


● Self-discharge characteristics

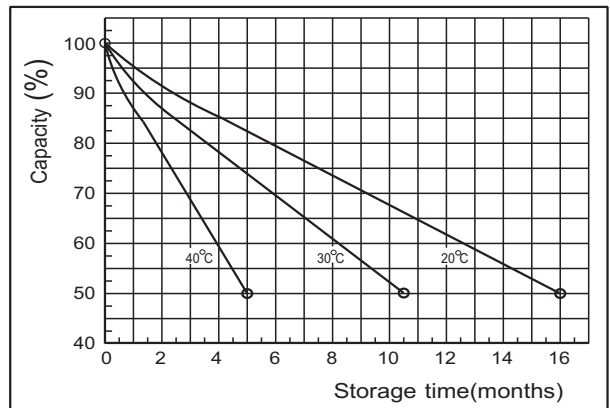


● Floating Life on Temperature

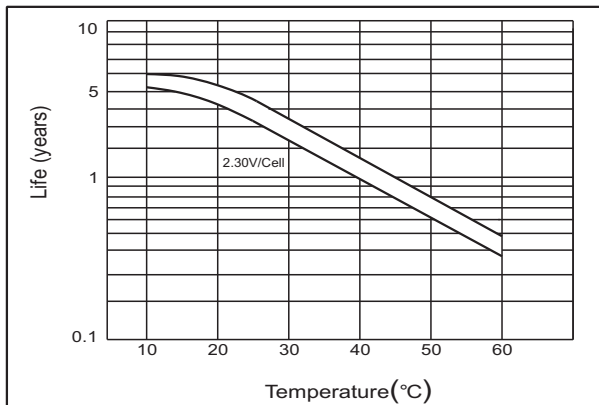

● Cycle service Life on D.O.D (25°C)

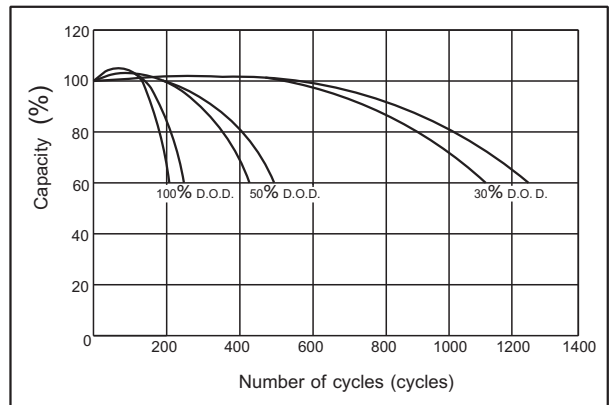

● The relationship for OCV and Capacity (25°C)

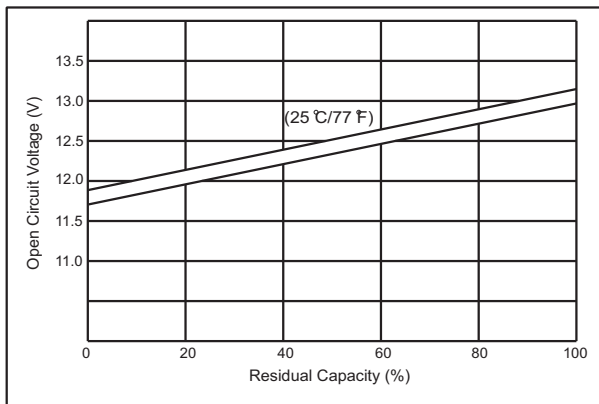

● The relationship for Charging voltage and Temperature

