

UNINTERRUPTIBLE POWER SYSTEMS



XT

G8000 Series

100/150/225/300 kVA UPS

3 Year
Warranty
See reverse for details



NEW
Higher Output
Power Factor!

- Output Power Factor 1.0
- Input Power Factor > 0.98
- Internal Isolation Transformer
- Input Current THD < 5%
- True On-Line Double Conversion UPS
- Wide Input Voltage Window
- IGBT DC Converter/Inverter Design
- Power Factor Correction for 100% Generator Compatibility
- Complete Front Access for Installation, Operation, and Service
- External Battery Options for Customized Battery Back-Up Time
- XT Series is Designed for Extreme Applications (Harsh Environments)
- 100% Unbalanced Load Capability
- SNMP/Web-Based Monitoring

Reliability in motion[®]

G8000 Series 100/150/225/300 kVA UPS

Model Number		T80S3K10KK6XSNH	T80S3K15KK6XSNH	T80S3K22KK6XSNH	T80S3K30KK6XSNH	
Capacity	kVA/kW	100/100	150/150	225/225	300/300	
Topology	True On-Line, Double Conversion, IGBT PWM, with Input Power Factor Correction and Unity Power Factor on Output					
Input	Voltage	AC Input 480 V 3-Phase, 3-Wire + Gnd/Bypass Input 480 V 3-Phase, 4-Wire + Gnd				
	Voltage Range	408 to 528 V (Without Utilizing Battery)				
	Power Factor	Greater than 0.98				
	Current THD	5% Max				
	Frequency	60 Hz (± 5%)				
	Current Limit	125% Max				
Output	Voltage / THD	480 V, 3-Phase, 4-Wire + Gnd/1% THD Typ				
	Frequency	60 Hz ± 0.01%				
	Voltage Regulation	± 0.5%				
	Power Factor	1.0 Unity (20% More Power)				
	Overload (Inverter)	125% for 10 Minutes; 150% for 60 Seconds				
	Overload (Bypass)	1000% for 1 Cycle, 125% Continuous				
Battery	DC Link	360 V DC				
	Ripple voltage	± 0.5%				
Environment	Temperature Range	0 to 30°C Unity PF (Operating) 0 to 40°C 0.8 PF (Operating)/-20 to +50°C (Storage)				
	Relative Humidity	30 to 95% Non-Condensing				
	Heat Rejection	23,720 BTUs/Hour	32,670 BTUs/Hour	49,000 BTUs/Hour	65,335 BTUs/Hour	
	Efficiency	93.5%	94%	94%	94%	
Dimensions	Dimensions (L x W x H)	36.8" x 31.5" x 78.7"	55.1" x 31.5" x 78.7"		76.8" x 35.4" x 78.7"	
	Weight	1680 Lbs	2756 Lbs	3307 Lbs	4400 Lbs	
	Altitude	6,600 Feet (2000 Meters) (Maximum Without Derating)				
	Audible Noise	< 65 dBA @ 1 Meter		< 68 dBA @ 1 Meter		70 dBA @ 1 Meter
Features	Output Unity Power Factor , Dual Input Feed, Output Isolation Transformer, RS232 and Dry Contact Interface					
Standards	UL 1778, CUL, NEC, ISO9001, ISO14001, ANSI C62.41 (IEEE 587)					
Warranty	Three Years on Electronics (UPS) when PMs are Purchased/Two Years Full on Battery (See Toshiba Warranty Policy for Full Details)					
Service	24-Hour Technical Support 1-877-867-8773 (1-UPS-TOS-UPS3)					

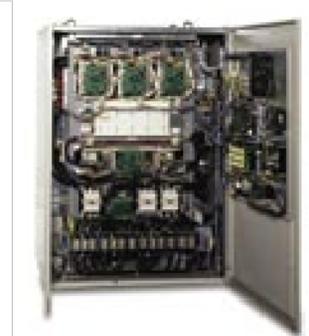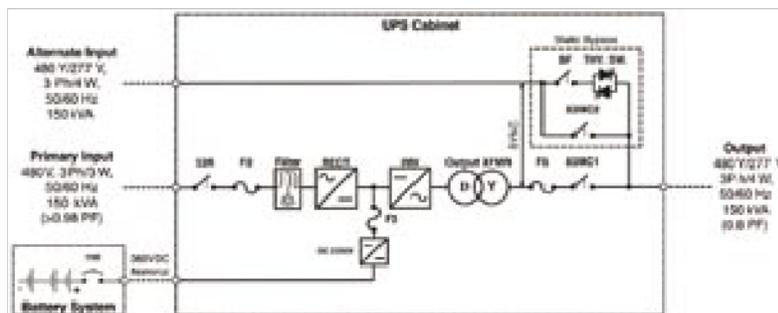

UPS ADJUSTABLE SPEED DRIVES MOTORS CONTROLS INSTRUMENTATION PLC

TOSHIBA

Available Through:

TOSHIBA INTERNATIONAL CORPORATION

INDUSTRIAL DIVISION

13131 West Little York Road, Houston, Texas 77041

Tel 713/466-0277 Fax 713/466-8773

US 800/231-1412 Canada 800/872-2192 Mexico 001/800/527-1204

www.toshiba.com/ind

Copyright 11/2006

